

Modelling for Uncertainties in Resistance for Jacket Platforms in Malaysia

V.J. Kurian, Z. Nizamani and M.S. Liew

Department of Civil Engineering, University Teknologi Petronas 31750, Tronoh, Perak, Malaysia

Abstract: Structural design strength is based on characteristic values of basic random variables of resistance. The behaviour of these variables of strength may vary in such a way that they become unsafe during any time of their design life. The data for this study was collected from an ISO certified fabrication yard in Malaysia and was used to make statistical models. The collected data is based on jackets which were under construction at the yard. Statistical analysis of the data was performed, taking into account the mean, coefficient of variation and bias values. Initially basic random variables were analyzed and after their statistical parameters were found, the basic stresses were simulated based on ISO 19902 code equations. Finally recommendations are made for the statistical characteristics of the random variables to be used in this region for the reliability analysis for tubular members and joints for ultimate limit state design of jacket platforms in Malaysia.

Keywords: Distributions, jacket platform, material resistance, modelling uncertainty, monte-carlo simulation ,

INTRODUCTION

The uncertainty in resistance variable can play a major part in safety, performance and structural behaviour of tubular members of jacket platform. There are 4 types of uncertainties in offshore engineering namely aleatory (inherent/ physical randomness), epistemic (statistical/ lack of knowledge), model-related and human error based. The physical randomness is always present in our nature, like wind, wave and current. This inherent randomness is most difficult to forecast. Epistemic uncertainty relates to fewer amounts of available data to analyse it like yield stress, diameter and thickness of member. This could be improved by the increase of data. Model uncertainties are due to our lack of understanding and simplification of the equation provided by codes for arriving at the stresses / forces in the element. These are measured against the actual test results. The human error uncertainty depends on knowledge of person designing the structure, construction and operation of the structure.

These uncertainties can make variations in resistance that will lead ultimately to significant effect on the reliability analysis of jacket platforms. The actual strength is always random in nature and it tends to show its behaviour in random way. To measure the uncertainty for reliability analysis, we need to define the basic variables involved in the limit state equation. These variables are used to define the probability/ cumulative density function along with other statistical properties like mean, coefficient of variance and bias. Once this random behaviour is understood, it makes the

task of designer much easier due to reduced uncertainty of material.

For reassessment of existing platforms, we need to define the actual uncertainties of the material and actual environmental loads acting at the site. Material uncertainties may change after some time due to degradation of material especially from fatigue and corrosion environment. These uncertainties are most important if we are considering lifetime extreme probability of failure instead of operational conditions of one year probability of failure.

The uncertainty related to prediction of resistance variability can be calculated using simulation techniques. In this study, Monte-Carlo simulation technique was used to generate values for fundamental resistance variable using their statistical distributions. Monte Carlo simulation was used by repetition of random samples using mathematical models. By simulation, the data was generated with consistent probabilities. This type of simulation is used, where assets are limited, experiments are not possible or extremely difficult to do. The transfer equation (the mathematical equation used for processing the data) is used for all the nine types of stresses. After the transfer equation is defined we need to find the distribution and its parameters for the random variables used in the given equations. The next step is to create high amount of random data in the order of 1×10^5 . This is due to the fact that our data include many values of that random variable small or large. Using the transfer equation, the large simulated data is generated based on our input random variables; this gives us reliable outcome without any experiments.

The study on these variations has been done on different land-based and offshore structures in other parts of the world and is available in literature. In this study, an effort is made to compile and analyse the data as per conditions in Malaysia which is required as per ISO 19902 requirement. There were three steps for this study. The first one was to collect the data i.e. data sets were made which were deemed appropriate for representing the random variables used in this study. The second step was to make statistical analysis of random variables used for design equations of jacket platforms i.e. tubular members. The Last step was to put these random variables in ISO 19902 code equations and get the basic parameters for the stresses. This step is more concerned with finding the probability distributions of these stresses. Here, nine random stresses are modelled using ISO 19902 code. After the analysis, it has been compared with other similar studies made in different regions related to offshore platforms.

LITERATURE REVIEW

Structure can fail if the characteristic value of load exceeds the characteristic load carrying capacity. Working Stress Design method is based on safety factor provided only to the resistance of the material without considering the uncertainties related to the loads as shown in (1):

$$S < \phi R \quad (1)$$

S = Load, R = Resistance and ϕ is material strength safety factor and it covers the randomness of the material and the load. Thus in WSD, factor of safety is given by: S.F. = R/S
Limit State theory is based on (2):

$$\phi R = \sum_{i=1}^n \gamma_i S_i \quad (2)$$

R = Characteristic / Nominal value of resistance, S_i = Characteristic / Nominal value of Load, ϕ = Resistance Factor (for uncertainty in stress), γ_i = Load Factor (for uncertainty in load), n = Number/ type of Load components.

It is considered that a structure will fail if the load effect S, exceeds the resistance of the member R and structural failure is shown as (3):

$$P_f = P(R < S) \quad (3)$$

Structural safety requires that, required strength /Stress (R) > Design Strength /Loads (S). Variability in resistance parameters was found through collection of data and fitting of it based on probability distribution.

Statistical parameters (mean, variation coefficient etc.) were obtained for geometrical and material properties.

Uncertainty modelling is the first important step for the reliability analysis for the jacket platforms. The reliability analysis is significantly dependent and very susceptible to the modelling of uncertainty (Mark *et al.*, 2001). Structural analysis calculations of offshore platforms are also subject to uncertainties. Uncertainties are dealt with by taking into consideration random variable parameters of load and resistance. Uncertainties are analysed based on how much basic information is available about that random variable parameter (Phani, 2006). Any structure designed and built with up-to-date knowledge, cannot be assumed as free from any chance of failure. It is a known fact that design involves many uncertainties which are not clear at the time of design and thus the structural engineer uses probabilistic reasoning for design of structure. Code developing authorities assume certain values for basic parameters, which are expected to cover for the uncertainties involved with the material properties during the entire life of the structure. Based on these uncertainties the model equations are developed which contains some factors. These are called factors of safety in WSD however load and resistance factors in limit state design and provide a high level of assurance that the structure will perform satisfactorily. Despite all these safety factors, some unforeseen load condition, may cause the failure of structure (Galambos 1972).

Uncertainty determination is based on computational tools, which enable the certification of analytical results by determining the component safety, subjected to the uncertain variable loads and resistances during design (Phani, 2006). Generally load tends to increase with time where as resistance tends to decrease with time, thus uncertainty of load as well as resistance increases with time (Melchers, 2002). Ellingwood says that the result of uncertainty is risk, which is defined as 'the product of the probability of failure and costs associated with failure of structure' (Ellingwood, 1994). Materials like steel have variability due to construction practices. The structure can also fail due to material failure from variation in dimensions as well as fabrication error.

These problems can only be solved by introducing the probability into account for the risks involved in the uncertain design of offshore jacket platforms. Probabilistic calculation techniques enable these uncertainties to be taken into account. Probabilistic calibration is done to find safety factors in a balanced manner, which takes into consideration the sources of uncertainty in environmental loads as well as material resistance (Niels, 2005).

Table 1: Details of selected platforms for resistance uncertainty

Platform	Location	Jacket Height (m)	Fabrication Year	No. of Jacket legs	Material Source
A	Peninsular Malaysia	73.40	2009	4	Japan
B	Peninsular Malaysia	72.00	2009	4	Japan
C	Peninsular Malaysia	60.40	2007	4	Japan
D	Sarawak	56.70	2005	4	Japan
E	Sarawak	53.60	2008	4	Japan
F	Sabah	55.20	2009	3	Japan

ISO 19902 Clause 7.7.4 requires that the test / measured data should be validated by simulation for the resistance of material taking into account the structural behaviour variability of material (International Standard Organization, 2007). DNV report 30.6 recommends that for resistance model normal distribution should be considered for the reliability analysis of jacket platforms (DNV, 1992). The difference between strength and load variable is highlighted by the fact that strength variable is considered unsuitable if its value is less than the mean value in case of failure. The load variable is unsuitable against failure, if it is greater than the mean value. Previous studies on resistance of material have been made by Paul and Bruchman (2002), Moses (1995), Moses and Stahl (2000), Frieze *et al.* (1997), Bomel (2003) and Duan and Zhou (2005). The mean value should be greater than 1.0 which shows the conservativeness of code equations and usually normal distribution is assumed for it (Joint Committee on Structural Safety, 2001). Modelling uncertainties are introduced by all the physical models used to predict the load effects and the structural response (Guenard, *et al.*, 1987). The results are based on geometric as well as material variability of material. The uncertainty model (X_m) is shown by (4):

$$X_m = \frac{\text{Actual Value}}{\text{Predicted value}} \quad (4)$$

METHODOLOGY

This study is based on assumption that reliable models of uncertainty can be developed, based on limited amount of data. Monte Carlo simulation can be used to generate long simulated data, from which the natural variability can be estimated based on the type of distribution the actual data. These uncertainty models were used to find the reliability of jacket components and joints based on ultimate strength limit state design.

Collection of data: The data was collected from a fabrication yard in Perak state of Malaysia for three months in 2010. The material properties were based on mill test reports for 6 jacket platforms. The details of

Table 2: Variability of material properties as shown in Mill test report Mechanical Test

Yield Stress	Tensile Strength	Elongation
319	475	31
308	471	24
320	475	28
318	471	31
357	505	26
364	508	26
338	499	26
357	505	26
388	508	22
361	499	23
388	521	22

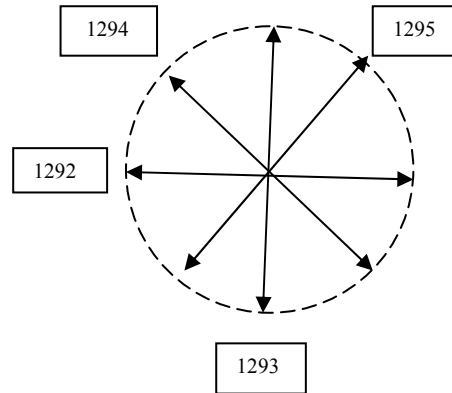


Fig. 1: Variability of diameter

these platforms are provided in Table 1 which cover all three regions of Malaysia i.e. Peninsular Malaysia, Sabah and Sarawak. Diameter and thickness were determined by field measurements. In total 72 mill tests results were used to measure the variability of material properties of tubular members. For geometric variability, 220 specimens were taken for diameter variation and for thickness variation the samples size was 26. The data was collected in the form of field measurement as well as mill test reports, as shown in Table 2 Fig. 1 and 2.

Statistical assessment: The strength of jacket depends on the variability of its components from which the member is built. The primary members of jacket are piles, legs, horizontal periphery braces, horizontal internal braces and vertical diagonal braces. All these members may come under nine different types of stresses when loaded. Codes provide equations to find

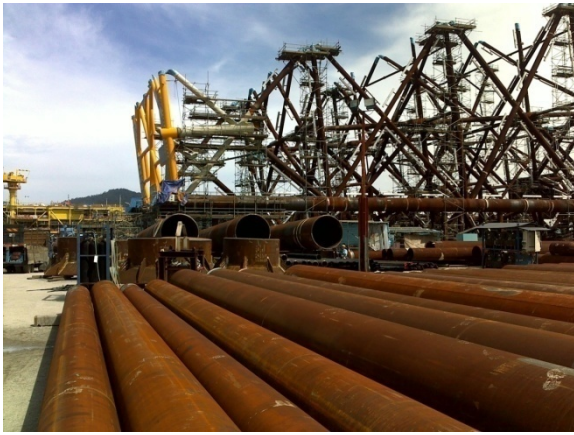


Fig. 2: Data collection for diameter and thickness of tubular members of jacket platform at fabrication yard

Table 3: Resistance uncertainties for jacket platforms

Types of Resistance uncertainty	Example
Material uncertainty	Yield strength, modulus of elasticity
Geometric uncertainty	Diameter, Thickness
Fatigue uncertainty	Degradation of material
Corrosion uncertainty	Degradation of material

these stresses based on resistance of random variables from which members are fabricated. Resistance variability includes dimensional variability like member diameter, thickness or material variability like yield strength, tensile strength or elongation properties of steel, modulus of elasticity. Table 3 shows the uncertainties related to offshore jacket platforms. Here in the geometrical material and geometric uncertainties were discussed, due to their relevance to ultimate limit state design.

Geometric and material properties: The geometrical uncertainty relates to the randomness due to geometrical variations which come from straightness, diameter, thickness, length. Though this type of uncertainty can be dealt properly, with the application of quality control used by manufacturing industry as per international standards, still there remains some uncertainty. There were variations between characteristic values mentioned on structural drawings and fabricated component of platform. For instance in the case of diameter, there were four values measured at each 90° were available. The characteristic value was already mentioned on the structural drawings. The mean bias was calculated by (5):

$$\text{Mean bias} = \frac{\text{Measured}}{\text{Nominal/mean}} \quad (5)$$

The mean bias values were then statistically analysed and respective distributions are reported. Coefficient of variation shows the variability in the model. For reliability analysis on resistance model we are concerned that for 95% the value taken by design engineer is higher than that value of resistance.

The material uncertainty includes yield strength, ductility and elongation, modulus of elasticity. Mill test reports were used to find the statistical properties of the tubular members. As per ISO requirement the ration of yield to ultimate tensile strength is given by Frieze *et al.* (1997):

$$\frac{\text{Yield strength}}{\text{Ultimate tensile Strength}} = \frac{355}{490} = 0.724 < 0.85$$

All variables in this study are assumed to be independently distributed. The data is analysed by using three goodness of fit test, i.e. Kolmogrov-Smirnov anderson Darling and Chi-Square test. The results were based on these test reports. The recommended values in this study are reported as MS (Malaysian study). The distribution types, Bias and Coefficient of Variations for materials found are used for the reliability analysis of steel tubular members of jacket platforms in Malaysia.

RESULTS AND DISCUSSION

Statistical properties of fundamental variable for resistance: The basic variables of resistance are thickness, diameter, yield strength and modulus of elasticity. The results from this study were compared with studies in China and North Sea.

Geometric properties: The uncertainties for Geometric properties, considered in this study are the diameter and thickness for legs and braces. These are the basic variables for the reliability analysis. Samples collected for thickness variations were 26, for leg diameter 260 and for brace diameters 113. The analysed data is shown in Table 4 and Fig. 3 to 5. The mean bias and variation coefficient of current study is shown in column 1 of these tables. Statistical analysis was used to find the parameters of distribution and probability density function based on goodness of fit tests. Three distributions were fitted and three best fit were reported. The results show that the best fit was achieved with normal distribution. The best distribution fit achieved for China and North Sea (DNV) code and ISO 19902 was also normal.

- **Material properties:** Material property uncertainties considered in this study were yield

Table 4: Statistical variation in tubular geometry

Type of variability	Statistical parameters	MS			Bomel (Bomel 2003)	Adams (Adams 1998)
		Leg >1000 mm	Brace <1000 mm	Duan -2005	ISO	
Diameter (mm)	Distribution	Normal	Normal	Normal	-	Normal
	V.C.	0.0014	0.0018	0.0025	0.001	0.0025
	M.C.	1.001	0.9993	1.0	1.005	1.0
wall thickness (mm)	Distribution	Normal	Normal	Normal	-	Normal
	V.C.	0.016	0.016	0.015-0.050	0.0024+0.25/T	0.021
	M.C.	1.024	1.024	1.0	1.0	1.0

MC = Mean Coefficient VC = Variation Coefficient

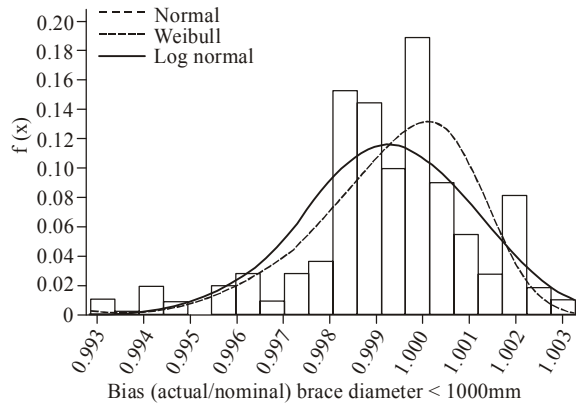


Fig. 3: Probability density function for brace diameter < 1000 mm

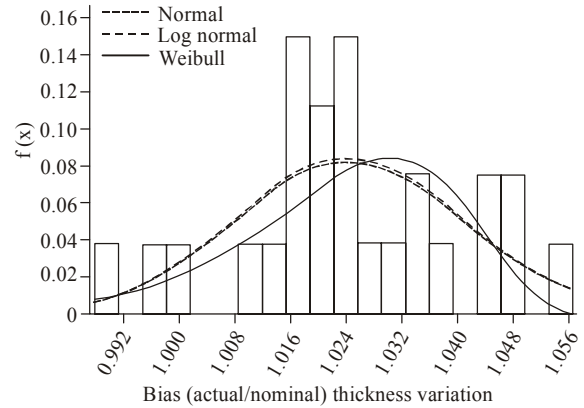


Fig. 5: Probability density function for thickness variation

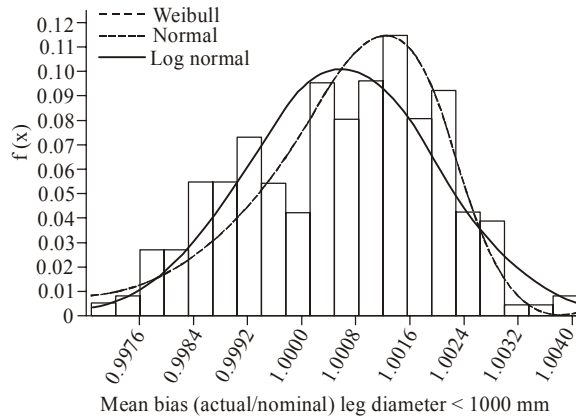


Fig. 4: Probability density function for leg diameter > 1000 mm

stress, tensile strength and elongation. Table 5 and Fig. 6 to 8 show the statistical properties and probability density function. The sample size for yield strength obtained from mill certificates were 72 with nominal yield strength of 345 MPa and 355

MPa. The mean bias and variation coefficient of current study is shown in column 1 of Table 5. Three distributions were fitted and the best fit out of three are reported as per goodness of fit tests. The analysis shows that the collected data fits with the normal distribution. The results achieved in China report normal distribution and North Sea (DNV) Code and ISO 19902 reported Log-Normal, though DNV (DNV, 1992) recommends the normal distribution for resistance or strength of members.

For tensile strength no comparison from literature review was available The sample size was 72 and mill tests reported characteristic strength of 490 MPa. The best fit was found to be normal distribution; other parameters were mean bias 1.123 and COV (Coefficient of variation) 0.039.

For elongation also no comparison from literature was available. The sample size was 70 and characteristic value of 18-20% was reported in mill

Table 5: Statistical variation in yield stress

	MS	Duan -2005	Bomel/ ISO (Bomel 2003)	Adams (Adams 1998)
Distribution	Normal	Normal	Log- Normal	Log- Normal
V.C.	0.05	0.050	0.06	-
M.C (Bias of mean)	1.23	1.12	1.13	1.02-1.09

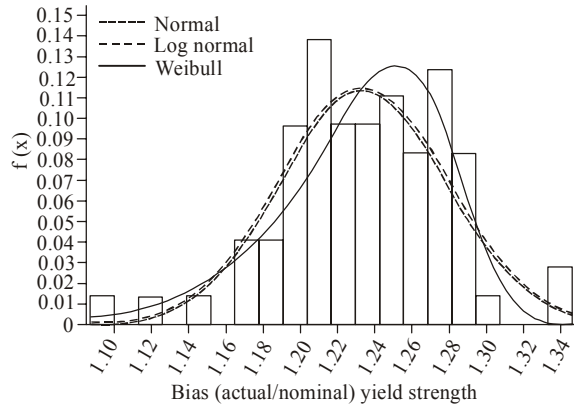


Fig. 6: Probability density function for yield strength

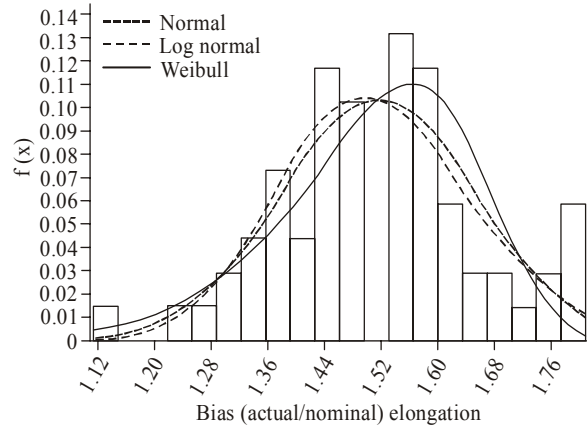


Fig. 8: Probability density function for elongation

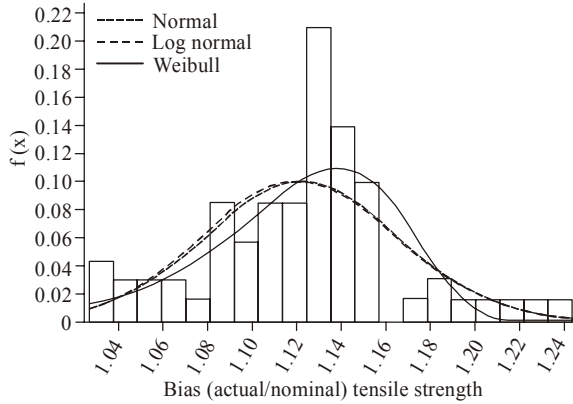


Fig. 7: Probability density function for tensile strength

certificates. After analysis the distribution as per goodness of fit test was found to be normal, with mean bias of 1.52 and COV of 0.09.

Probabilistic model stresses used in ISO Code 19902: API RP2A WSD and ISO 19902 code of practice identify nine types of stresses which jacket members can undergo during operating and storm loading conditions. Equation used for the model is taken from ISO 19902. Monte-Carlo simulation was used during this study. Simulated sample size was fixed at 1×10^5 and the nominal f_y used was 345/355 MPa.

Table 6: Resistance model for one stress

Types of stresses	Statistical parameters	MS	Bomel/(Bomel 2003) ISO	Duan 2005	MSL (MSL 2000)			HSE(Bomel 2001)	Moses (Moses1995)
					ISO	LRFD	WSD		
Axial tension resistance	M.C.	1.26	1.0	1.19	-	-	-	-	-
Axial compression (column buckling) resistance	VC	0.05	0.0	0.07	-	-	-	-	-
	M.C.	1.26	1.05	1.16	1.26	1.23	1.16	1.06	1.19
Axial compression (Local buckling) resistance	VC	0.05	0.04	0.12	0.06	0.05	0.08	0.05	0.12
	M.C.	1.24	1.07	1.233	1.26	1.32	1.40	1.07	-
Bending resistance	VC	0.05	0.07	0.10	0.09	0.08	0.08	0.07	-
	M.C.	1.13	1.11	1.32	1.16	1.16	1.43	1.11	1.26
Shear resistance	VC	0.05	0.09	0.11	0.09	0.1	0.12	0.10	0.11
	M.C.	1.26	1.0 ^a	0.19	-	-	-	-	-
Hydrostatic resistance	VC	0.05	0.05	0.09	-	-	-	-	-
	M.C.	1.59	1.14 ^a	-	1.43	1.43	1.85	1.14	1.05
	VC	0.16	0.14	-	0.12	0.12	0.12	0.12	0.11-0.15

*Log-Normal, ^a Not known

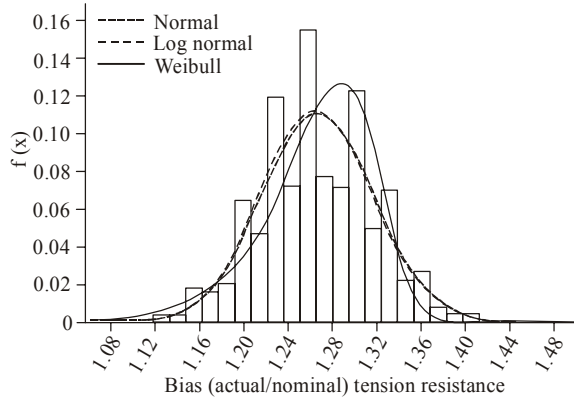


Fig. 9: Probability density function for tension resistance

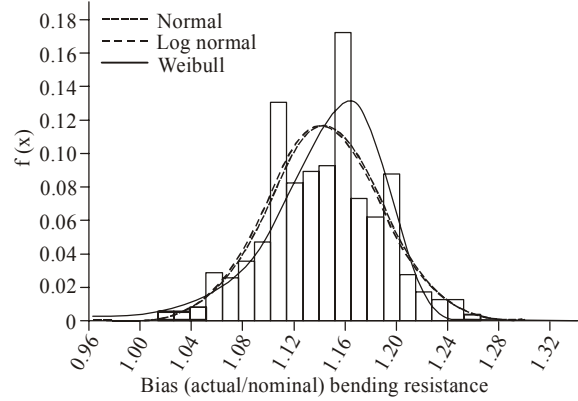


Fig. 12: Probability density function for bending resistance

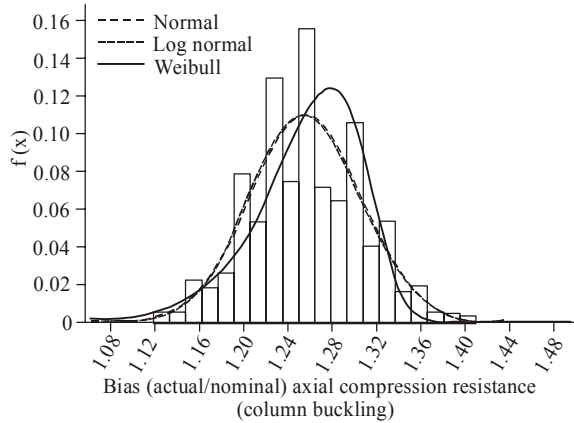


Fig. 10: Probability density function for axial compression resistance (column buckling)

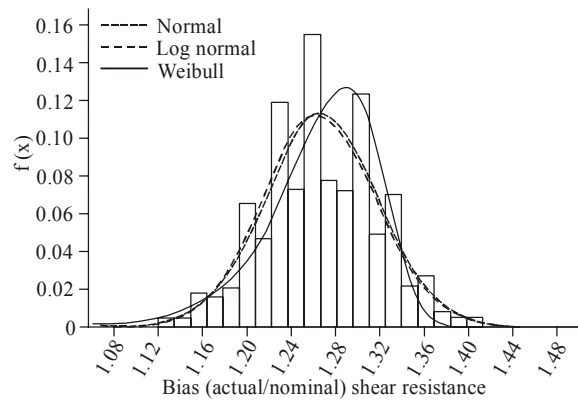


Fig. 13: Probability density function for shear resistance

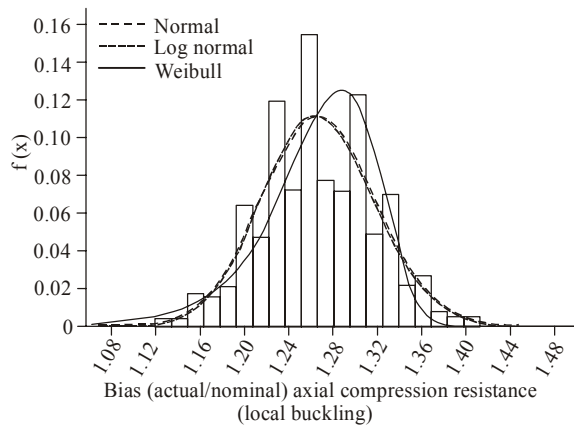


Fig. 11: Probability density function for axial compression resistance (local buckling)

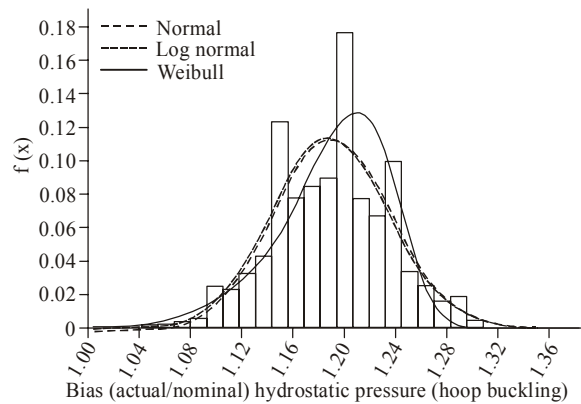


Fig. 14: Probability density function for hydrostatic pressure (hoop buckling)

- **Single stresses:** ISO 19902 and API RP2A code identify following types of member stresses, in which jacket platform undergoes during operation. These are :

- Axial tension
- Axial compression (local buckling) and (column buckling)
- Bending
- Shear

- Hydrostatic pressure/ hoop buckling

Table 6 and Fig. 9 to 14 show the statistical properties and probability density function of the single stresses. The parameters of distribution for geometric and material properties, used in the given equation were normal. The law of probability says that combined distributions will give the result of normal distribution. The mean bias and variation coefficient of current study is shown in column 3 of these tables. Column 4 shows the data reported for North Sea which was incorporated in ISO code and column 5 shows data development of LRFD code for China.

• **Combination of two Stresses:**

These are identified as:

- Axial tension and bending
- Axial compression local buckling and bending
- Axial compression column buckling and bending

Table 7 and Fig. 15 to 17 show the uncertainty model for the code equations. This uncertainty model was used for the reliability analysis for jacket platforms in Malaysia. The coefficient of variation and mean bias values are reported in the given tables. In this study the mean values achieved were 1.19 to 1.28. For ISO code the same were in range of 1.03 to 1.25 which is not much different from this study. The variation coefficient achieved in this study was in range of 0.047-0.050 but the same achieved for ISO code was 0.083-0.094 which shows more variation in the results. This is due to difference in basic uncertainty models used for geometry and material properties used in the given

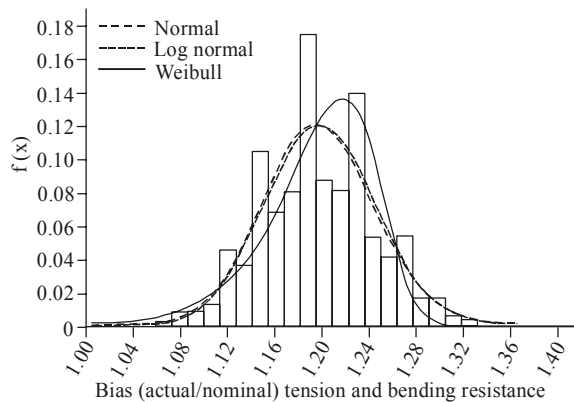


Fig. 15: Probability density function for tension and bending resistance

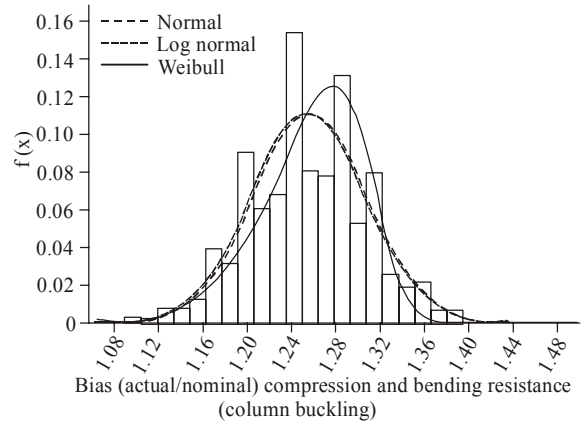


Fig. 16: Probability density function for compression and bending resistance (column buckling)

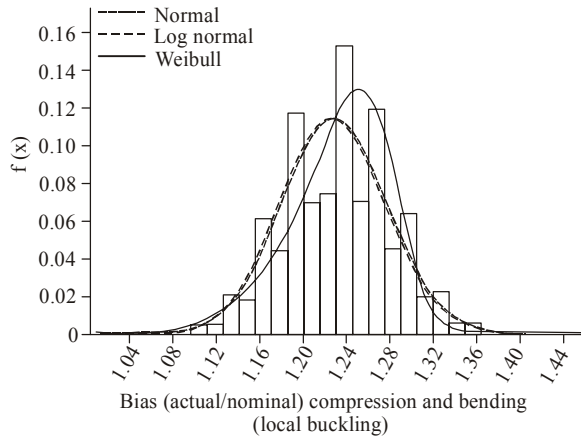


Fig. 17: Probability density function for compression and bending (local buckling)

equations. There may be other reasons also such as improved quality of material as well as fabrication variation coefficients introduced in the manufacturing industries. Due to this reason uncertainties are reduced, with less variability in material and in fabrication of tubular members.

• **Combination of three stresses:** These are:

- Axial tension, bending and hydrostatic pressure/hoop buckling and
- Axial compression local buckling, bending and hydrostatic pressure,
- Axial compression column buckling, bending and hydrostatic pressure.

Table 8 and Fig. 18 to 20 show the uncertainty model in these equations. The mean bias values achieved for this study was 1.30 and the same for ISO

Table 7: Resistance model for combined two stresses

Types of stresses	Statistical parameters	MS	Bomel/ ISO (Bomel 2003)	MSL (MSL 2000)			HSE(Bomel 2001)
				ISO	LRFD	WSD	
Tensile & Bending Resistance	M.C. VC	1.19 0.05	1.11 0.10	- -	- -	- -	- -
Compression & Bending Resistance (Column Buckling)	M.C. VC	1.27 0.05	1.03 0.08	1.14 0.10	1.15 0.10	1.15 0.09	1.03 0.08
Compression & Bending Resistance (Local Buckling)	M.C. VC	1.23 0.05	1.25 0.08	1.41 0.06	1.43 0.05	1.61 0.11	1.25 0.08

Table 8: Resistance model for member under combined three stresses

Types of stresses	Statistical parameters	MS	Bomel/ ISO (Bmel 2003)	MSL (MSL 2000)			HSE (Bomel 2001)
				ISO	LRFD	WSD	
Tension, bending and Hydrostatic Resistance	M.C. VC	1.27 0.05	1.08 0.11	- -	- -	- -	- -
Compression bending and Hydrostatic Resistance	M.C. VC	1.28 0.05	1.20 0.11	1.33 0.16	1.29 0.12	1.43 0.20	1.25 0.14
Column Buckling	M.C.	1.30	1.20	1.35	1.36	1.63	1.25
Compression bending and Hydrostatic Resistance Local Buckling	VC	0.05	0.16	0.19	0.13	0.19	0.14

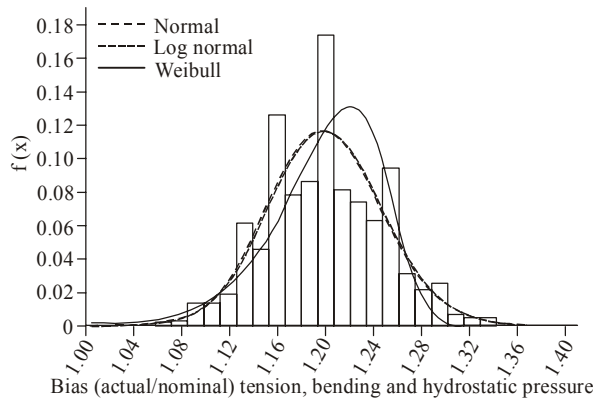


Fig. 18: Probability density function for tension, bending and hydrostatic pressure

was in the range of 1.08-1.20. This shows that mean values for this study are higher by small margin as compared to ISO code. The variation coefficient for this study was 0.05 and for ISO it is 0.11 to 0.16 which is higher than the present study, showing higher variation in ISO data. Thus the variability in this study is less than as reported in literature. Thus with less uncertainty, higher reliability can be achieved.

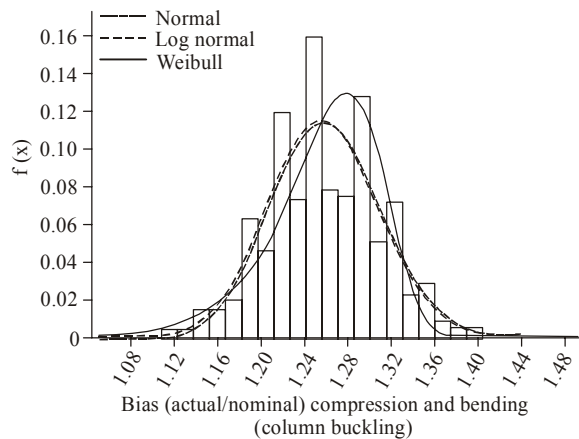


Fig. 19: Probability density function for compression, bending and hydrostatic pressure (column buckling)

CONCLUSION

The actual strength of tubular member varies from the characteristic /nominal strength, which is taken for design of platforms. This is due to the variation in basic variables like material strength and dimensional

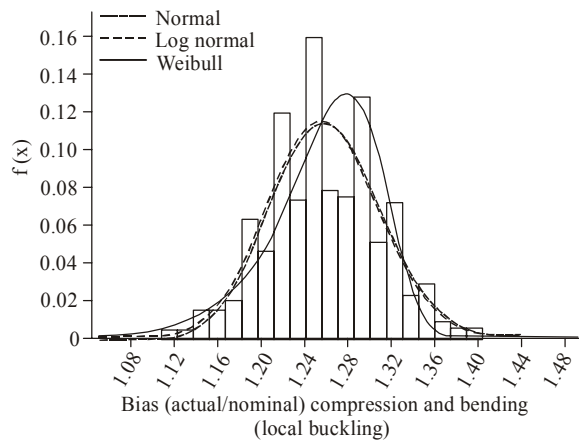


Fig. 20: Probability density function for compression, bending and hydrostatic pressure (local buckling)

properties like yield stress, elastic modulus, diameter and thickness. The bias and COV evaluated in this study, on the basis of database of actual data, reflects the geometry and material variability in Malaysia. To develop reliability models we need to identify the variability in actual tubular members and model stress equations used by ISO code and API WSD code. Following results were achieved during this study:

- Uncertain basic variables i.e., thickness, diameter, yield strength, tensile strength and elongation are modelled based on actual variability in the material available in Malaysia. The variation coefficient and mean bias values are reported. The reported values either meet the required criteria set by ISO or even show less variability in basic parameters used in equations for finding stresses in tubular members of jacket platforms.
- Nine stress equations were statistically modelled in this study. The model equations recommended by ISO code were used to find the variability in these equations. The uncertainty models achieved in this study were compared with models developed for ISO 19902 and LRFD code development in China. The variation in current study is less than that reported in literature with less variability in uncertainty model. Using this variability in the reliability model, our structure will have higher reliability. The results from this research were used for reliability analysis of components and joints for ultimate limit state design of jacket platforms in Malaysia.

REFERENCES

- Adams, A., A.V.R. Warren and P.C. Masson, 1998. On the Development of Reliability-Based Design Rules for Casing Collapse. SPE 48331, SPE Applied Technology Workshop on Risk Based Design of Well Casing and Tubing, The Woodlands, Texas, May 7-8.
- Bomel, 2001. Comparison of tubular member strength provisions in codes and standards. O. T. R. 2001/084.
- Bomel, 2003. Component based Calibration of North Western European Annex Environmental Load Factors for the ISO Fixed Steel Offshore Structures Code 19902. Health and Safety Executive, Sudbury, United Kingdom.
- DNV, 1992. Structural reliability analysis of marine structures. Classification Note 30.6.
- Duan, Z.D. and D.C. Zhou, 2005. Calibration of LRFD format for steel jacket offshore platform in China offshore area (1): Statistica parameters of load and resistances. China Ocean Eng., 20(1): 1-14.
- Ellingwood, B.R., 1994. Probability-based codified design: Past accomplishments and future challenges. Struct. Safety, 13(3): 159-176.
- Frieze, P.A., J.T. Loh and I. Lotsberg, 1997. Back ground to draft ISO provisions on Intact and damaged members. Proceedings of Behaviour of Offshore Structures (BOSS, 97). By J. Vugts, (Ed.), 3: 111-126.
- Galambos, T.V., 1972. Load factor design of steel buildings. AISC Eng. J., pp: 6.
- Guenard, Y., J. Goyet and J. Labeyrie, 1987. Structural safety evaluation of steel jacket platforms. Marine Structural Reliability Engineering Symposium, Arlington, VA, pp: 169-183.
- International Variation coefficient Organization (ISO) 19902, 2007. Petroleum and Natural Gas Industries-Fixed Steel Offshore Structures. TC/SC: TC 67/SC 7: ICS: 75.180.10.
- Joint Committee on Structural Safety, 2001. Probabilistic Model Code (Working Document). (JCSS), Zurich.
- Mark, M., E. Birger, D.N. Veritas, C. Ocean and H. Grigorianet, 2001. Structural Reliability Assessment of Ekofisk Jacket under Extreme Loading. OTC 13190, Houston, Texas.
- Melchers, R.E., 1999. Structural Reliability Analysis and Prediction. John Wiley and Sons, Chichester, New York.

- Moses, F., 1995. Application of reliability to formulation of fixed offshore design codes. Marine Structural Reliability Symposium, pp: 15-30.
- Moses, F. and B. Stahl, 2000. Calibration issues in development of ISO variation coefficients for fixed steel offshore structures. J. Offch. Mec., 122(1): 52-56.
- MSL, 2000. Load factor calibration for ISO 13819 Regional Annex: Component resistance. Offshore Technology Report, 2000/072.
- Niels, J.T.J., 2005. Partial safety factors and characteristics values for combined extreme wind and wave load effects. ASME, 127: 242-252.
- Paul, E.H., D. Bruchman, A.A. Ibrahim, B.M. Ayyub, 2002. Uncertainties in material strength, geometric and load variables. Naval Eng. J., 114(2): 139-166.
- Phani, R.A., 2006. Robust estimation of reliability in the presence of multiple failure modes. Ph.D. Thesis, Mechanical and Materials Engineering, Wright State University, pp: 136.